

HENEX

1D LASER BARCODE SCANNER HC-2000

With dustproof protection.

Decode most popular 1D barcodes

Ready for all POS system and ideal for retail.

Plug and play, not need any driver, easy to operate.


Ergonomic design, very comfortable operating sense.

Using latest decoder technology, quick and fluent reading performance.

Blue LED indicator and loud buzzer sound, can quick feedback reading codes

APPLICATION

Mainly used in business,payment,health care,tobacco,some industries,etc.

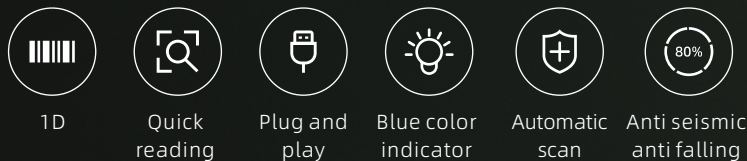

HC-2000 TECHNICAL SPECIFICATION

OS Windows iOS / Android	Light Source Visible Laser Diode 650nm	Scan Model Handhand (Manual) / Handfree (Automatic)	Scan line Single line	Scan Rate 300 scans per second
Scan accuracy 0.1mm(4mil)@Code 39, PCS=90%	Print Contrast More than 30% (UPC/EAN 100%)	Visual Indicator Blue LED Lights , Buzzer	Interfaces HID USB、USB Virtual COM、 RS-232	Scan Angle Elevation angle 65° Turn angle 30° Off-angle 55°
Transmission Mode Wired Transmission	Dimension L x W x H 173*66*94 (mm)	Weight 216g (With Cable)	Cable Standard 1.8M straight	Case Material ABS+PC、TPU
Firmware Update Computer online upgrade	Power parameter Input Voltage: 5VDC±5% Working current: 85mA (Typical value)	Environmental parameters Operating Temperature: -20℃--+60℃ Working Humidity: 5% to 95% relative humidity, non-condensing Storage Temperature: -40℃--+70℃ Electrostatic protection: ±8 kV (Direct discharge) Ambient brightness: 0~100,000Lux Drop Resistance : 2M IP: IP52	Safety regulations CE (EN 55032:2015; EN 55035:2017), ROHS, BIS, EN62368-1:2014+A11:2017 FCC PART 15 CLASS B	
Scan distance 0~280mm @ UPC/EAN 0.33mm PCS=90%	Decoding Capability 1D: UPC/EAN/JAN,UPC-A & UPC-E,EAN-8 & EAN-13, JAN-8 & JAN-13, ISBN/ISSN, Code 39 (with full ASCII), Codabar (NW7), Code 128 & EAN 128,Code 93, Interleaved 2 of 5 (ITF),Addendum 2 of 5, IATA Code,MSI/Plessy, China Postal Code,Code 32 (Italian Pharmacode),RSS 14,RSS Limited, RSS Expanded等			

Optional configuration

Scanner bracket
Realize handfree scan